

PMG140


Elevator Traction Machine
Machines de traction ascenseurs



Voltage	380 V	Tension
Suspension	1:1	Suspension
Motor type	PM	Type de moteur
Brake	DC110V 1 A	Frein
Weight	210 kg	Poids
Max. Static Load	2 800 kg	Charge stat. maxi.

Horizontal type is optional

Position horizontale possible

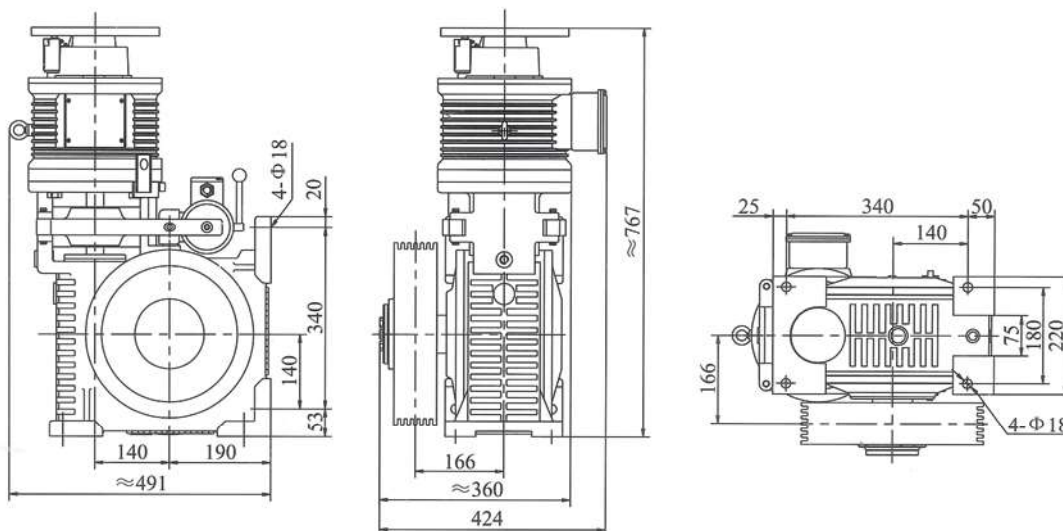

Load Charge	Speed Vitesse	Height Course	Ratio Ratio	Ø Sheave Ø Poulie	Rope sheave Câbles	Power Puissance	Rated speed Vitesse de rotation	Frequency Fréquence	Pole Pôle	INS. class	IP code
(kg)	(m/s)	(m)		(mm)	(mm)	(kW)	(rpm)	(Hz)			
400	0,5	≤ 50	51:1	Ø 340	5XØ8X12	2,5	1440	96	8	F	IP21
400	0,63	≤ 50	51:1	Ø 425	4XØ10X16	3	1440	96	8	F	IP21
400	1,0	≤ 50	51:2	Ø 340	5XØ8X12	4	1440	96	8	F	IP21
500	0,5	≤ 50	51:1	Ø 340	6XØ8X12	3	1440	96	8	F	IP21
500	0,63	≤ 50	51:1	Ø 425	4XØ10X16	4	1440	96	8	F	IP21
500	1,0	≤ 50	51:2	Ø 340	6XØ8X12	4,7	1440	96	8	F	IP21
400	0,6 to 1,0	≤ 50	51:2	Ø 530	4XØ*8/11X16	3,5	950	63,3	8	F	IP21
450	0,6 to 1,0	≤ 50	32:1	Ø 530	4XØ*8/11X16	4	1150	76,7	8	F	IP21

* Groove V35°.
 Incremental encoder.
 * gorges V35°.
 Codeur incrémental.