


YJ245D

Elevator Traction Machine
Machines de traction ascenseurs



<i>Suspension</i>	1:1	<i>Suspension</i>
<i>Control</i>	VVVF	<i>Contrôle</i>
<i>Brake (DZE-12E)</i>	DC110V 2 A	<i>Frein (DZE-12E)</i>
<i>Weight with support</i>	900 kg	<i>Poids avec support</i>
<i>Max. Static Load</i>	11 000 kg	<i>Charge stat. maxi.</i>

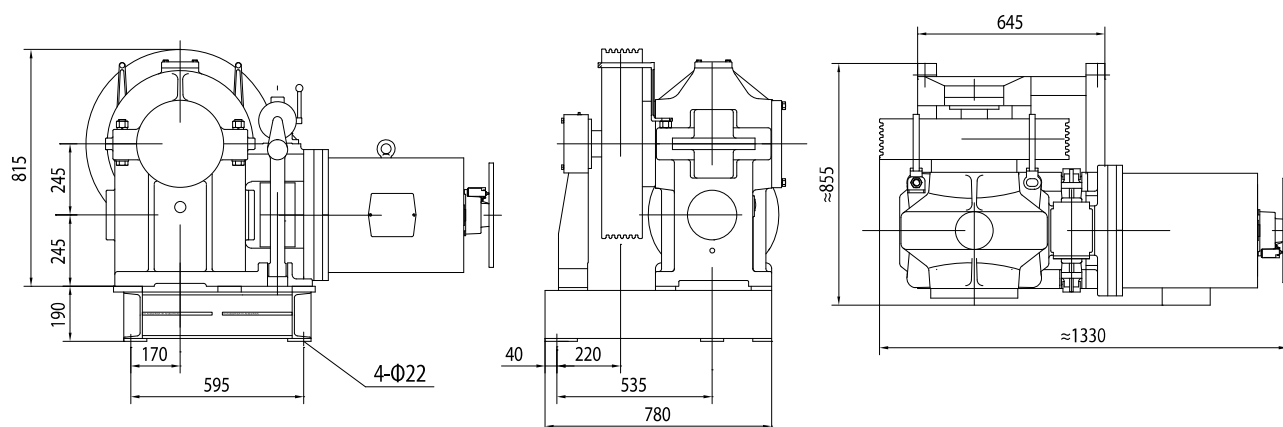

<i>Load</i> <i>Charge</i>	<i>Speed</i> <i>Vitesse</i>	<i>Ratio</i>	<i>ø Sheave</i> <i>ø Poulie</i>	<i>Rope sheave</i> <i>Câbles</i>	<i>Power</i> <i>Puissance</i>	<i>Pole</i>
(kg)	(m/s)		(mm)	(mm)	(kW)	
1250	0,5	61:1	Ø 650	6XØ13X20	7,5	6
1250	1,0	61:2	Ø 650	6XØ13X20	15	6
1250	1,6	61:2	Ø 650	8XØ13X20	22	4
1250	1,75	55:2	Ø 650	8XØ13X20	22	4
1250	2,0	49:2	Ø 650	8XØ13X20	26	4
1350	0,5	61:1	Ø 650	6XØ13X20	11	6
1350	1,0	61:2	Ø 650	6XØ13X20	15	6
1350	1,6	61:2	Ø 650	8XØ13X20	22	4
1350	1,75	55:2	Ø 650	8XØ13X20	22	4
1350	2,0	49:2	Ø 650	8XØ13X20	26	4
1600	0,5	61:1	Ø 650	8XØ13X20	11	6
1600	1,0	61:2	Ø 650	8XØ13X20	18,5	6
1600	1,6	61:2	Ø 650	8XØ13X20	26	4
1600	1,75	55:2	Ø 650	8XØ13X20	26	4
1600	2,0	49:2	Ø 650	8XØ13X20	30	4
1250	0,5	61:1	Ø 610	6XØ13X20	7,5/1,5	6/24
1250	1,0	61:2	Ø 610	6XØ13X20	15/3,5	6/24
1350	0,5	61:1	Ø 610	6XØ13X20	11/2,3	6/24
1350	1,0	61:2	Ø 610	6XØ13X20	15/3,5	6/24
1500	0,5	61:1	Ø 610	8XØ13X20	11/2,3	6/24
1500	1,00	61:2	Ø 610	8XØ13X20	18,5/4,3	6/24

Left sheave type is optional.

5/6 x Ø 16 x 25 rope sheave is optional

Incremental encoder.

Poulie à gauche possible.

Câbles 5/6 x Ø 16 x 25 possibles.

Codeur incrémental.